


LOAD CONTROL RECEIVER

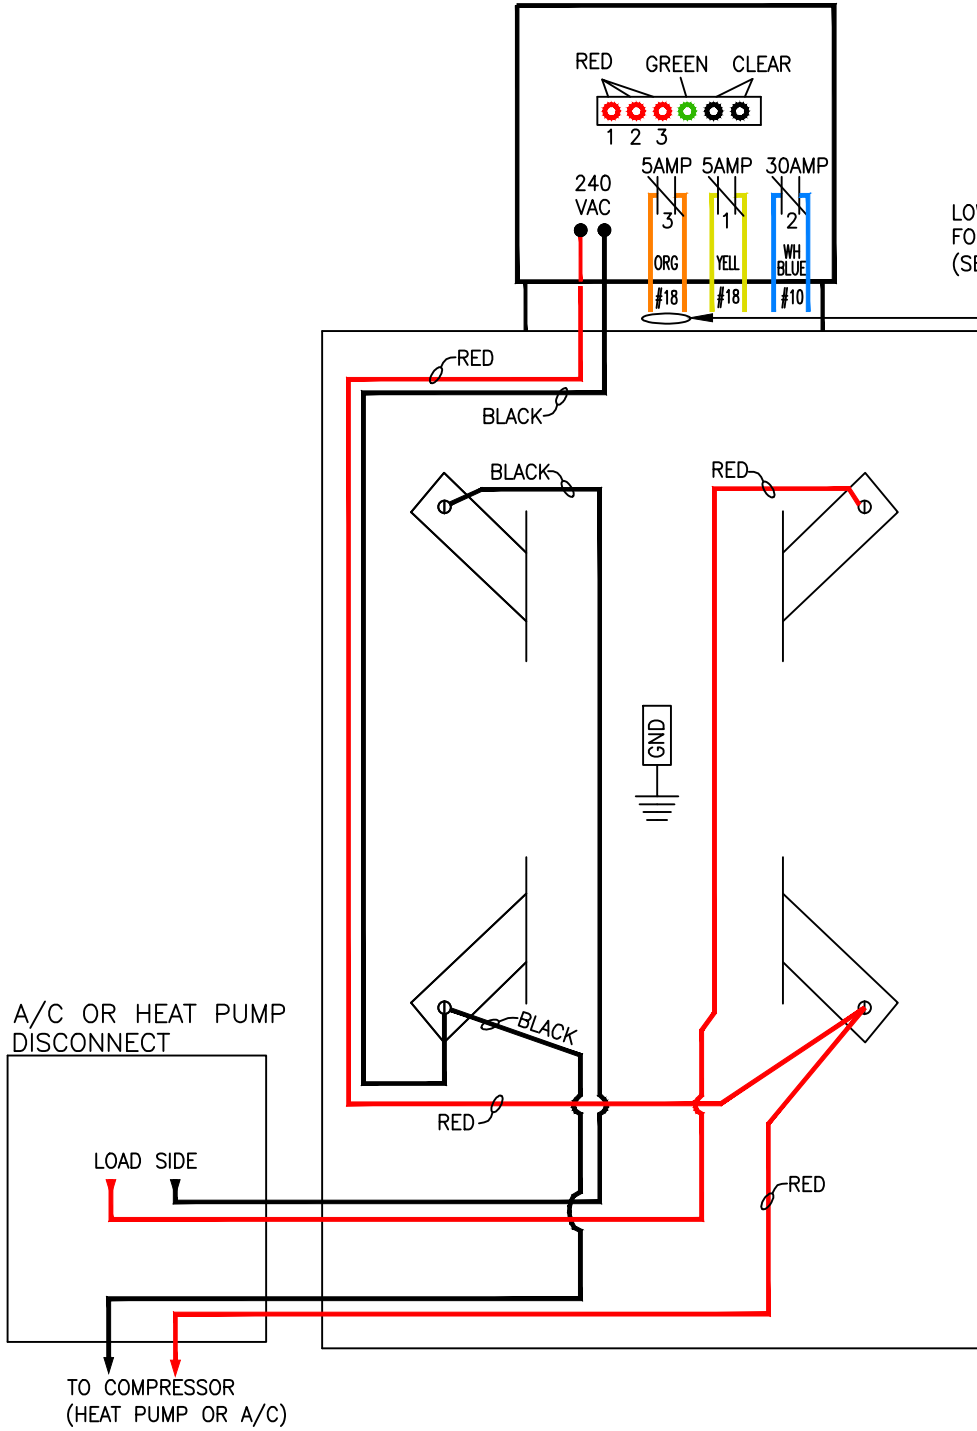

LOW VOLTAGE
FOR AC CONTROL
(SEE DIA-7A)

LOAD MANAGEMENT
METER SOCKET & LCR
#W77600000

CALL DEA ENERGY SERVICES
AFTER WIRING IS COMPLETED TO
SCHEDULE METER INSTALLATION

A/C OR HEAT PUMP
DISCONNECT

LOAD SIDE

TO COMPRESSOR
(HEAT PUMP OR A/C)

NOTES:

1. MOUNT METER SOCKET & RECEIVER OUTSIDE 4' TO 6' ABOVE GROUND LEVEL.
2. ALL WIRING SHALL MEET THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE. (NEC)

DAKOTA ELECTRIC ASSOCIATION

GUIDE DRAWING

THIS DRAWING WAS DEVELOPED FOR
A TYPICAL INSTALLATION AND MAY
NOT BE APPLICABLE TO ALL
INSTALLATIONS CONSULT AN EXPERT
FOR FINAL INSTALLATION DESIGN

SUB-METERED HEAT PUMP OR
AIR CONDITIONING

CLASS 1 / DIV 1-8

OWNER ENG. MANAGER
DATE 03/26/14

NO.
DIA-11A