
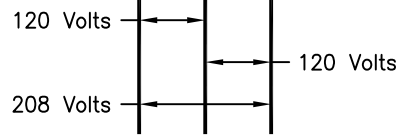


Form 12S
 120/208 Volt 3-Wire
 Single Phase
 200 Amp Ring-less Meter Socket with Lever Bypass

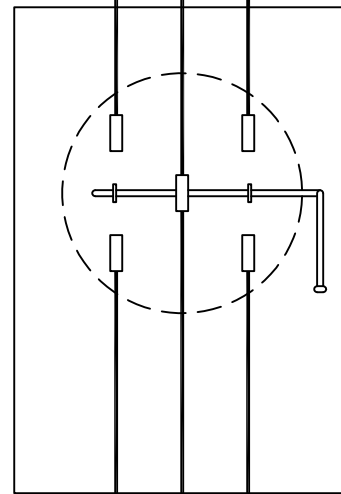

To Service Panel

NOTES:

1. This installation is used in apartment units where three phase 120/208 is supplied for the main building and each apartment is metered with a 12S connection.
2. 200 amp maximum.

DAKOTA ELECTRIC ASSOCIATION		
GUIDE DRAWING		SINGLE PHASE THREE WIRE 120/208 VOLT 200 AMP METER CONNECTION DIAGRAM
THIS DRAWING WAS DEVELOPED FOR A TYPICAL INSTALLATION AND MAY NOT BE APPLICABLE TO ALL INSTALLATIONS CONSULT AN EXPERT FOR FINAL INSTALLATION DESIGN		OWNER CRAIG TURNER NO. DATE 5/15/12 MTR-12S